

Linear Recessed

Linear ground-recessed luminaire for outdoor installation. Architectural LED in-ground linear range inspires architects, designers and system integrators with its exceptional quality, homogeneous light output and remarkable creativity.

Versatile and High Impact


Extremely versatile walk-over and drive-over linear luminaire with diffused lighting effects.

Innovative light sources and efficient design combine to form a high impact and low maintenance lighting system.

Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

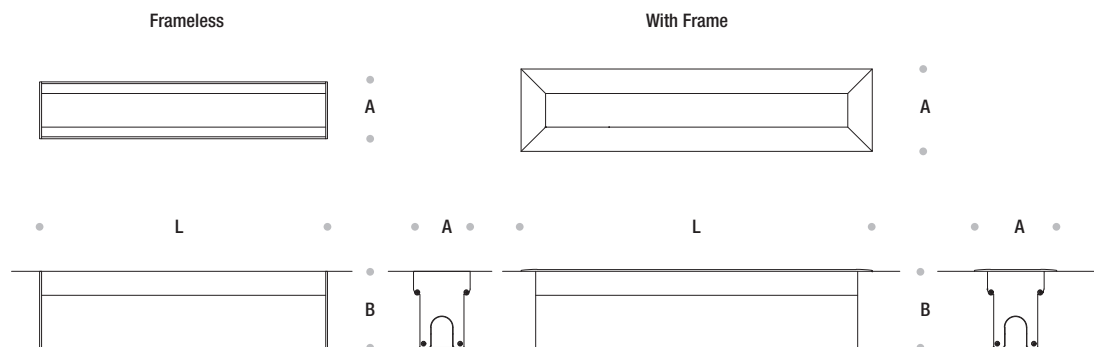


iAxis Diffused Recessed


Codes	Power	A (mm) Frameless	A (mm) With Frame	B (mm)	L (mm) Frameless	L (mm) With Frame
AR812601	18W	64	92	85	1014	1067
AR812602	36W	64	92	85	1014	1067
AR812603	9W	64	92	85	514	567
AR812604	18W	64	92	85	514	567



For detailed information about the
iAxis Diffused Recessed

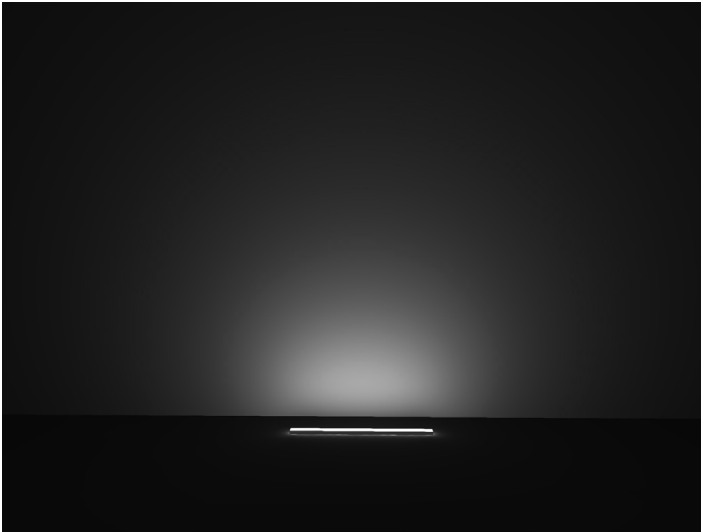

Diffused Beam

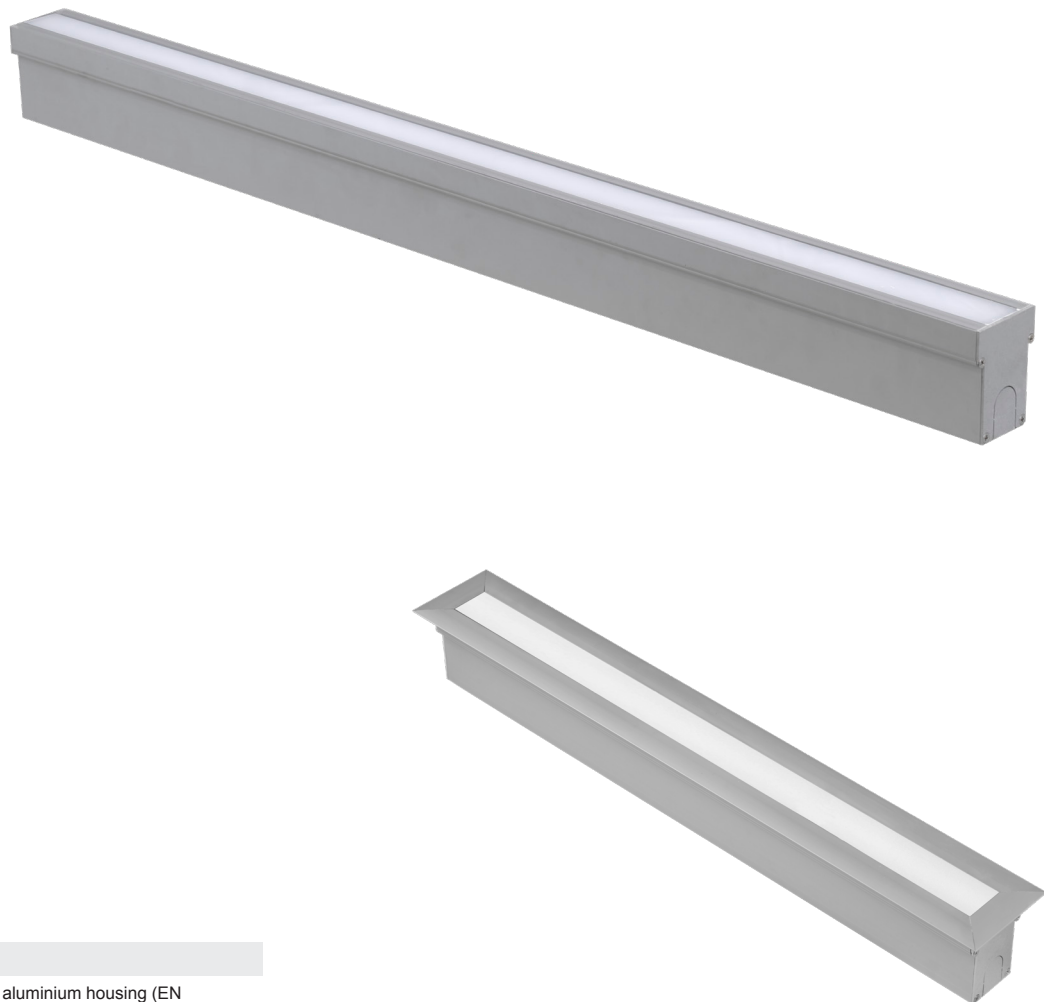

Technical Features

Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Power unit is built in. End-to-end connection via power connectors. Includes recessing box.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DMX / RDM, DALI Interface

Protection Class IP67

Impact Resistance IK10

Insulation Class I

Complies with EN60598-1 and relevant standards.