

Wall Mounted

iBaros guarantees a high degree of standardized design quality in urban spaces with timeless style and classical design. The luminaires have a unique appearance and at the same time meet the high requirements of modern lighting technology. iBaros fits perfectly into large inner-city areas and is ideal for illuminating the streets or squares with historical significance.

Architectural LED lighting luminaire range inspires architects, designers and system integrators with its exceptional quality, homogeneous illumination and remarkable creativity.

High-Performance and Effective


The luminaire is available in both single and double pole and pendant arm configurations with optical lenses in a variety of distributions. High-performance light engines customize iBaros's performance specifically for pedestrian environments and beyond for applications such as parking lots, streetscapes, transit and other environments with every lighting needs.

The luminaire with stylized appearance and with improvements in installation, maintenance and service life offers optimum light distributions that ensure effective values, visual comfort and light output for pedestrian areas and streets without light pollution. With the latest innovations, iBaros offers advanced lighting technology with refined aesthetics.

Modern Design and Easy to Install

The modernly designed luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

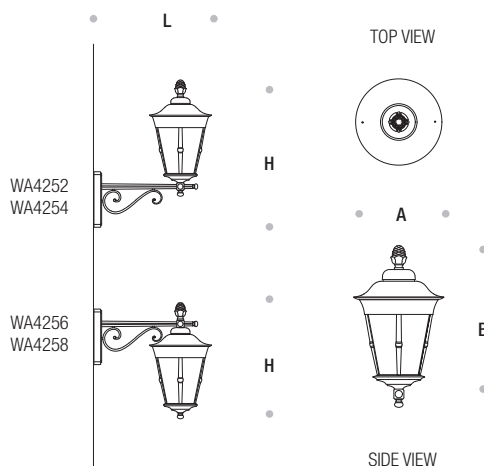

iBaros						
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	L (mm)
WA4252	18W	3000K / 4000K	240	450	570	460
WA4254	54W	3000K / 4000K	330	650	750	620
WA4256	18W	3000K / 4000K	240	450	570	460
WA4258	54W	3000K / 4000K	330	650	750	620



For detailed information about the
iBaros



Diffused beam



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.