

Pillars



Timeless lighting bollard and pillar series with minimal and robust design ideal for homogeneous illumination of paths, parks, walkways and gardens. In iCone emits a warm, atmospheric light and presents a unique design vision with a range of durable, high-performance models suitable for versatile and translucent outdoor use.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional light distribution and remarkable creativity.

Smooth and Modern


Smooth, round, decorative bollard with clear lines and pure architectural volumes of light provides high visual comfort. Combines elements and geometric shapes in a clean design with high performance LED module for proper illumination.

Modularity and refined look unleash creativity while delivering high performance for a wide range of applications. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.




iCone
iCone





iCone				
Codes	Power	Colour Temperature	A (mm)	H (mm)
PA3172	15W	3000K / 4000K	200	220



For detailed information about the
iCone

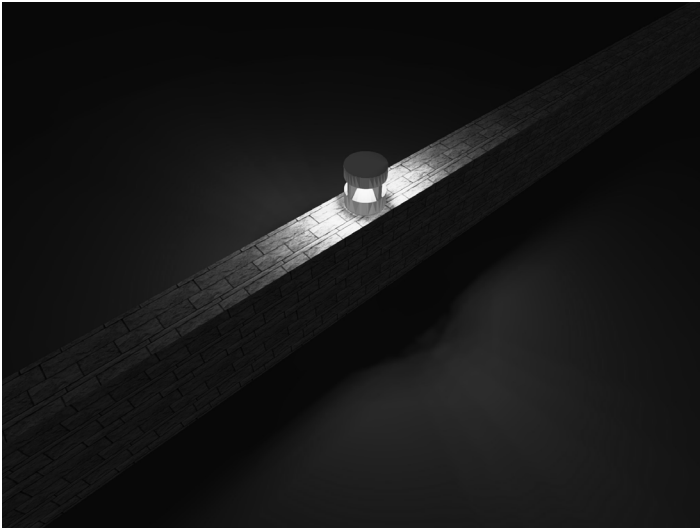

Diffused beam

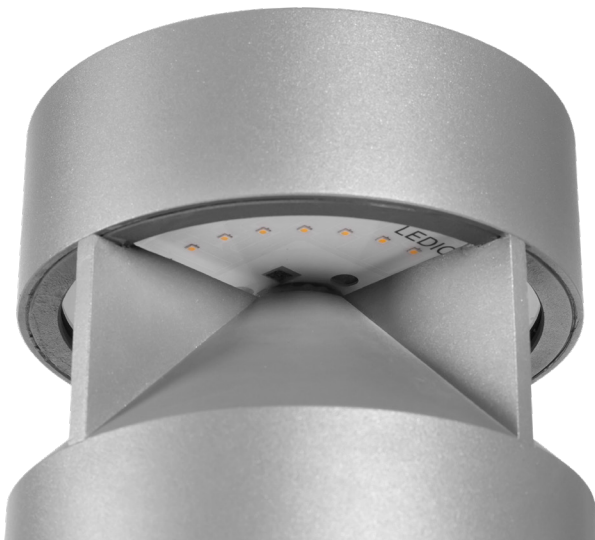

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.