

Wall Recessed



Recessed lighting system for walkways designed for use with LED light sources to ensure high visual comfort.

Architectural wall recessed die-cast aluminium LED recessed range inspires architects, designers and system integrators with its exceptional quality, homogeneous beam and remarkable creativity.

High Impact and Compact


Innovative light sources with low recessing depth combine to form a high impact and low maintenance product.

iCore is a compact and high performance luminaire with impressive versatility. Suitable for easy installation on walls.

Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.




iCore
iCore





iCore					
Codes	Power	Colour Temperature	A (mm)	B (mm)	C (mm)
WA683201	3W	3000K / 4000K	95	25	127



For detailed information about the
iCore

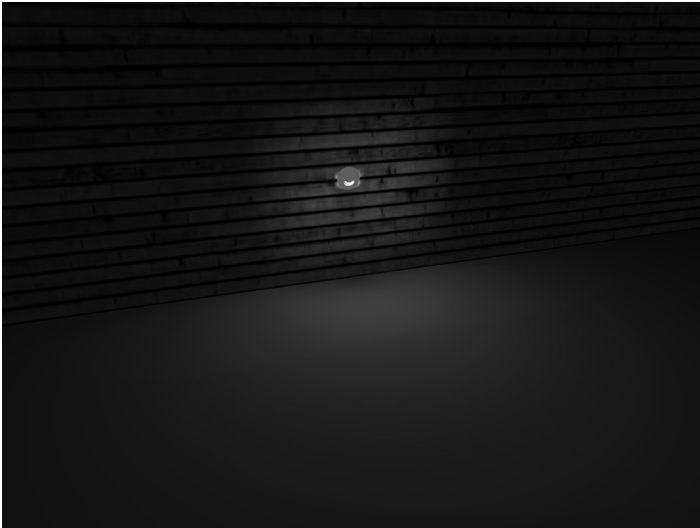

15 degree



Technical Features

Corrosion resistant die cast aluminium with natural brass frame and temperature-resistant silicone gaskets.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems DALI Interface (External)

Protection Class IP65

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.