

Wall Mounted

Light column and bollard series with minimal and robust design in different heights, ideal for ambient illumination of squares, avenues, paths, parks, walkways and gardens. Vertical diffused lighting distribution developed for iDrano guarantees visual comfort, safety and improved quality of space.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Elegant and Attractive


Stylish bollard and light column with clear lines and opal diffusers provide high visual comfort and glare control. The modular luminaires, based on elegant design aluminium profile and housing, offer various aesthetic and performance solutions.

For all its diversity and flexibility, iDrano with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.


The product is supplied pre-wired, permitting simple, rapid and safe installation.

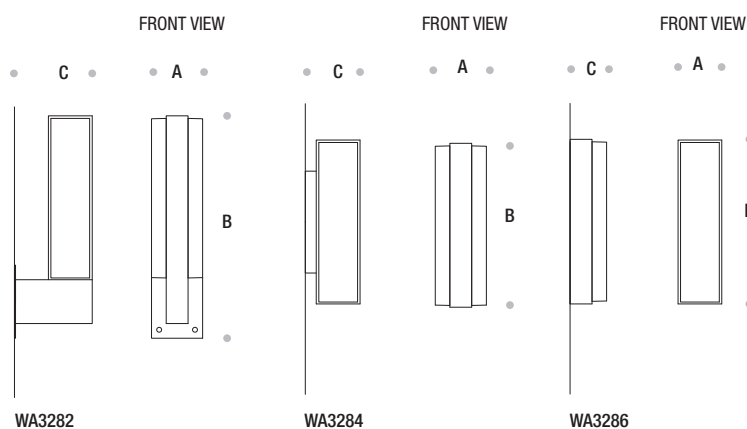


iDrano					
Codes	Power	Colour Temperature	A (mm)	B (mm)	C (mm)
WA3282	18W	3000K / 4000K	140	570	215
WA3284	18W	3000K / 4000K	140	450	150
WA3286	18W	3000K / 4000K	120	450	100



For detailed information about the iDrano

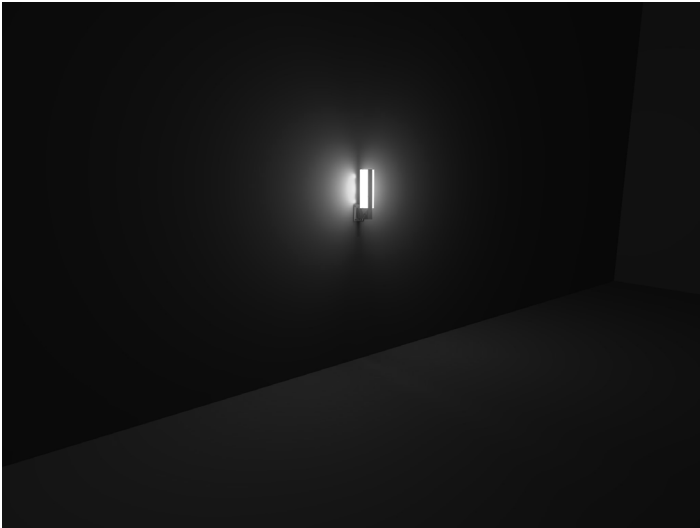

Diffused beam

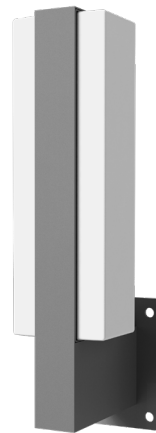

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems DALI Interface

Protection Class IP54

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.