

## Linear Recessed

Linear slim ground-recessed luminaire for outdoor installation. Architectural LED in-ground linear range inspires architects, designers and system integrators with its exceptional quality, homogeneous light output and remarkable creativity.

### Compact and High Performance


Extremely versatile walk-over and drive-over linear luminaire with diffused lighting effects.

Innovative light sources and efficient design combine to form a high impact and low maintenance lighting system.

### Slim Design and Easy to Install

The slim luminaire, which is equipped with an external power supply unit, is optionally available with DMX or DALI control or in the user-friendly On-Off version.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

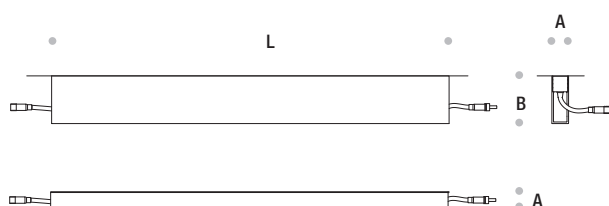


iLinex S Recessed


| iLinex S Recessed |       |        |        |        |
|-------------------|-------|--------|--------|--------|
| Codes             | Power | A (mm) | B (mm) | L (mm) |
| AR8081            | 6W    | 22     | 60     | 1000   |
| AR8082            | 10W   | 22     | 60     | 1000   |
| AR8083            | 14W   | 22     | 60     | 1000   |



For detailed information about the  
iLinex S Recessed

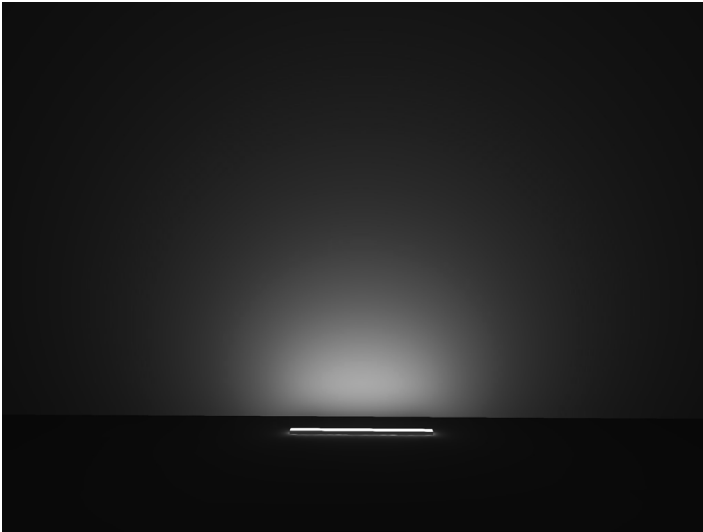

Diffused Beam

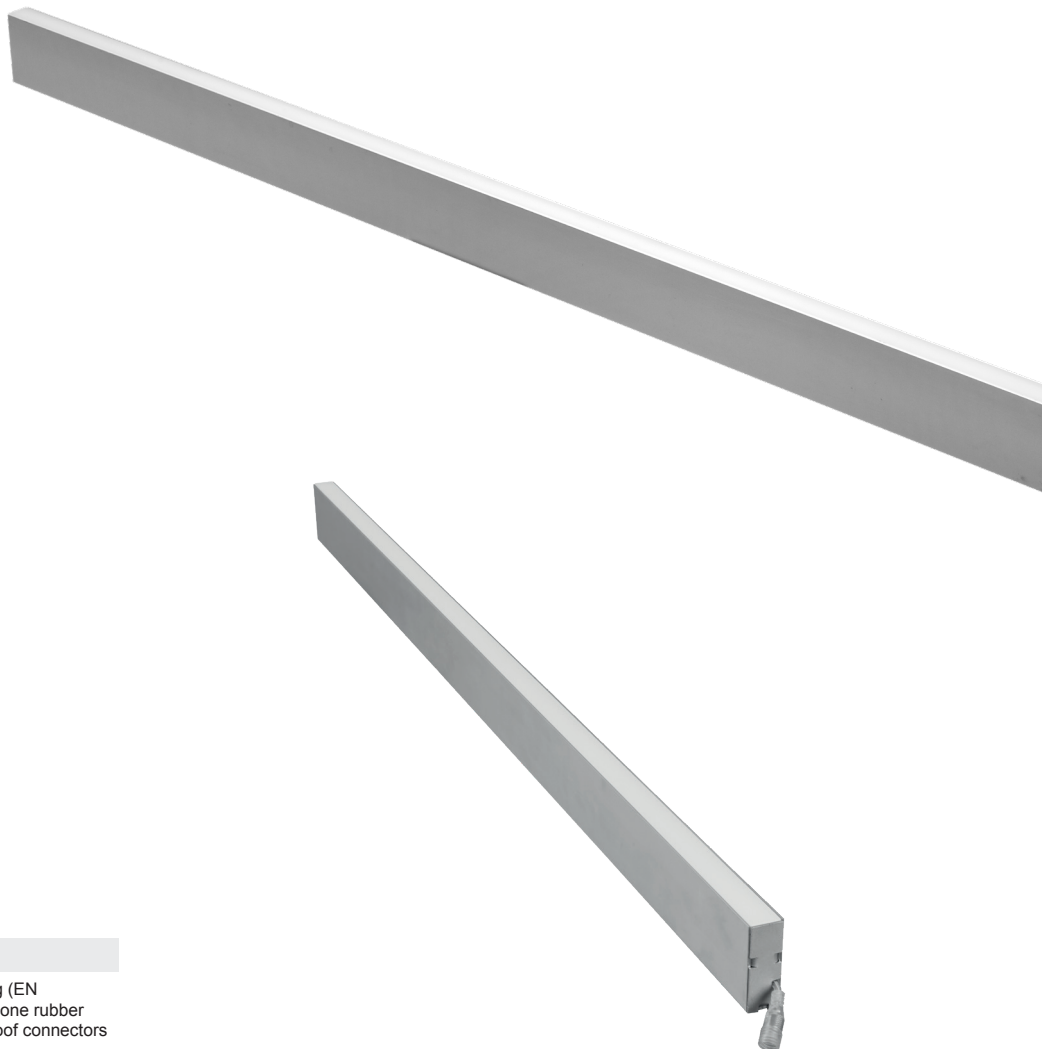

#### Technical Features

Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Operates with a remote driver. Includes waterproof connectors and recessing box. BSILINEA® LED Module.

LED MacAdam Step 3

Nominal Voltage 24V DC

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DMX / RDM, DALI Interface (External)

Protection Class IP67

Impact Resistance IK10

Insulation Class III

Complies with EN60598-1 and relevant standards.