

Wall Recessed

iObzor R series is a versatile solution for all architectural areas. Offers a long-lasting illumination for recessed wall lighting. The entire product range is characterized by innovative mounting techniques and design solutions that guarantee very low temperatures on the external surface of the luminaire.

Architectural wall recessed die-cast aluminium LED recessed range inspires architects, designers and system integrators with its exceptional quality, homogeneous beam and remarkable creativity.

Compact and High Performance


Innovative light sources with low recessing depth combine to form a high impact and low maintenance product.

iObzor R is a compact and high performance luminaire with impressive versatility. Suitable for easy installation on walls.

Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.




iObzor R



iObzor R				
Codes	Power	Colour Temperature	A (mm)	B (mm)
AC5058	Max 6W	3000K / 4000K	93	95



For detailed information about the iObzor R

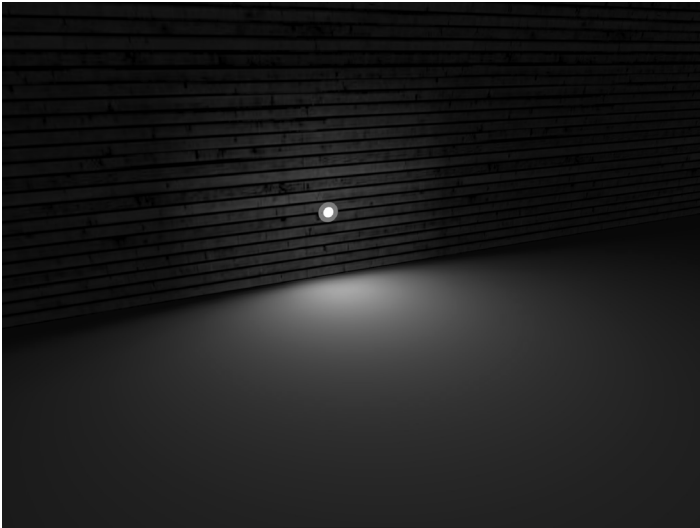

120 degree



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Includes recessing box and stainless steel frame.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems On - Off

Protection Class IP67

Impact Resistance IK10

Insulation Class II

Complies with EN60598 and relevant standards.