

Wall Recessed

iRina is a steplight perfect for functional outdoor lighting; it has been specially developed to combine the possibility of creating light paths that improve orientation with extremely discreet and comfortable lighting.

Architectural wall lighting range inspires architects, designers and system integrators with its exceptional quality, soft beam and remarkable creativity.

Compact and Versatile


The uniform, clear and glare-free light beams offer a high level of visual comfort and enrich walkways, stairwells and pedestrian entrances with atmospheric ambience.

Compact and high-performance luminaire with impressive versatility. Suitable for easy installation on walls.

Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.


The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

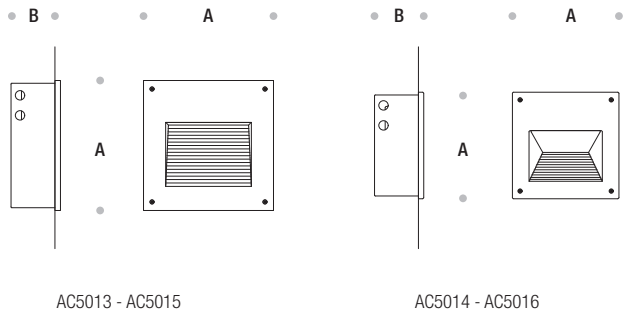


iRina				
Codes	Power	Colour Temperature	A (mm)	B (mm)
AC5013	24W	3000K / 4000K	300	116
AC5014	24W	3000K / 4000K	300	116
AC5015	12W	3000K / 4000K	250	116
AC5016	12W	3000K / 4000K	250	116




For detailed information about the
Ilda

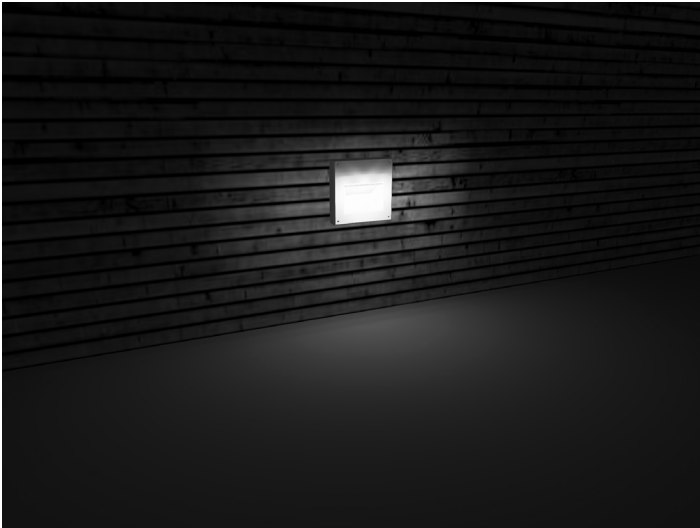

Directed downwards light

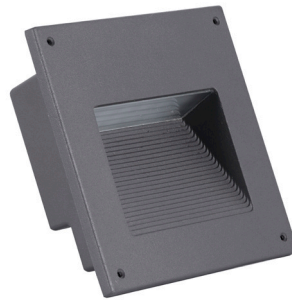

AC5013 - AC5015

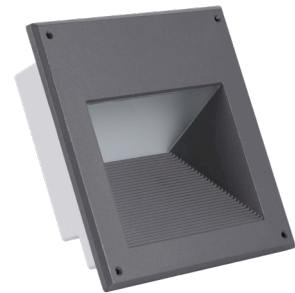

AC5014 - AC5016

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Includes recessing box.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems On - Off

Protection Class IP65

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.